

WITA Delta HE 100 F | HE 120 F

Product specials


- 5 Years Warranty
- Night mode / min. operation level
- LCD consumption level
- Venting function
- Anti-block function
- also available as PWM version



Technical data

| | |
|-------------------------|--|
| Max. pump lift | 10.0 m 12.0 m |
| Max. flow rate | 9.950 l/h 9.950 l/h |
| Power consumption | 5 - 123 W 5 - 127 W |
| Control | 5 constant characteristics, 6 proportional characteristics |
| Additional function | minimal operation function / manually night mode, automatically night mode, LCD consumption display, venting function, anti-block function |
| Supply voltage | 1 x 230V, 50 Hz |
| Motor protection | No external motor protection required |
| Ip rating | IP 42 |
| Ambient temperature | 0 °C to +40 °C |
| Media temperature | +5 °C to +110 °C |
| Temperature class | TF 110 as per CEN 335-2-51 |
| Max. system pressure | 10 bar |
| Connection size | DN 40, DN 50 |
| Installation lengths | DN 40 / 220 mm, DN 50 / 240 mm |
| Pump housing material | variant in grey cast iron, cataphoresis coated |
| Weight incl. insulation | DN 40 / 7.0 kg, DN 50 / 8.0 kg |
| EEI | ≤ 0.23 |
| Special equipment | Also available with PWM module |

WITA Delta HE 100 F 40

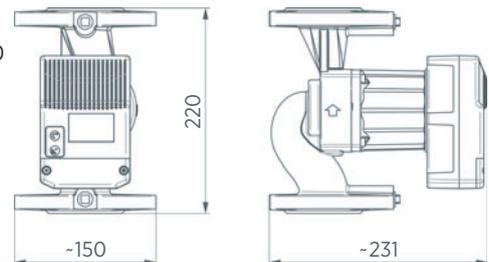

WITA Delta HE 120 F 50

