



WITA

HE+ go.future



| 40 | 50 | 60

Product advantages

- 5 years warranty
- Automatic night setback
- LED display of power consumption
- Smart Adapt
- Anti-block function
- Delivery head mode is configurable in 4 m, 5 m and 6 m

Technical data


| 40 | 50 | 60

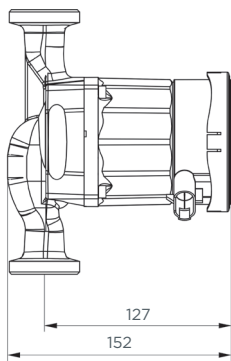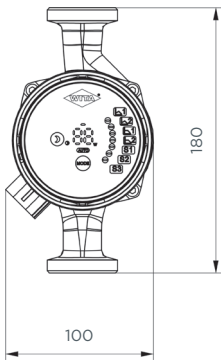


All product dimensions are presented in mm.

Maximum delivery head	4 m 5 m 6 m
Maximum flow rate	2800 l/h 3300 l/h 3500 l/h
Power consumption	23 W 32 W 41 W
Regulation	3 constant speed modes, 2 constant pressure characteristics, 2 proportional pressure modes
Additional functions	automatic night setback, LED display of power consumption, Anti-block function
Supply voltage	1 x 230 V, 50 Hz
Motor protection	no external motor protection required
Protection rating	IP 42
Ambient temperature	0 °C to +40 °C
Media temperature	+5 °C to +110 °C
Temperature class	TF 110 according to EN 60335-2-51
Maximum system pressure	10 bars
Connection sizes	DN 15, DN 20, DN 25, DN 32
Installation lengths	110 mm, 130 mm, 180 mm
Pump housing material	130 mm, 180 mm in grey cast iron cataphoresis coated; 110 mm, 130 mm in brass
Weight incl. insulation	2.1 kg
EEI	≤ 0.20

Characteristic WITA HE+ go.future | 40-xx

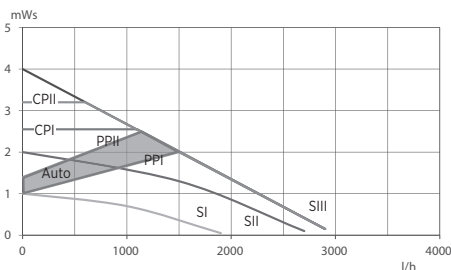

Characteristic WITA HE+ go.future | 50-xx

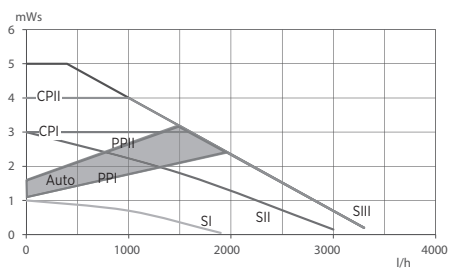

Characteristic WITA HE+ go.future | 60-xx

