

Pump technology / High-efficiency circulation pumps 



**EEI**  
≤ 0.20



# WITA Delta HE light 35 | 55

## Product advantages



- 5 years warranty
- LED display of characteristics
- Anti-block function
- Venting function



www.tuv.com  
ID 1111248085

## Technical data


| 35 | 55

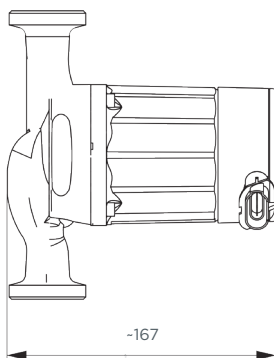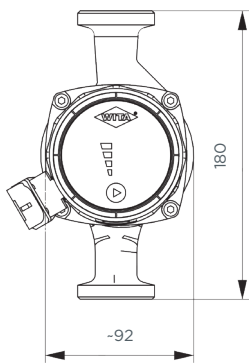

|                         |   |
|-------------------------|---|
| Maximum delivery head   | 4 m   6 m   |
| Maximum flow rate       | 2800 l/h   3600 l/h   |
| Power consumption       | 3-23 W   3-42 W   |
| Regulation              | 4 constant speed mode<br>4 proportional pressure modes                        |
| Additional functions    | LED display of characteristics, Anti-block function<br>Venting function       |
| Supply voltage          | 1 x 230 V, 50 Hz  |
| Motor protection        | no external motor protection required   |
| Protection rating       | IP 42   |
| Ambient temperature     | 0 °C to +40 °C  |
| Media temperature       | +5 °C to +110 °C  |
| Temperature class       | TF 110 according to EN 60335-2-51   |
| Maximum system pressure | 10 bars   |
| Connection sizes        | DN 15, DN 20, DN 25, DN 32  |
| Installation lengths    | 110 mm, 130 mm, 180 mm  |
| Pump housing material   | 130 mm, 180 mm in grey cast iron cataphoresis coated; 110 mm, 130 mm in brass |
| Weight incl. insulation | 2.5 kg  |
| EEI                     | ≤ 0.18   ≤ 0.20   |

All product dimensions are presented in mm.

Characteristic WITA Delta HE light 35

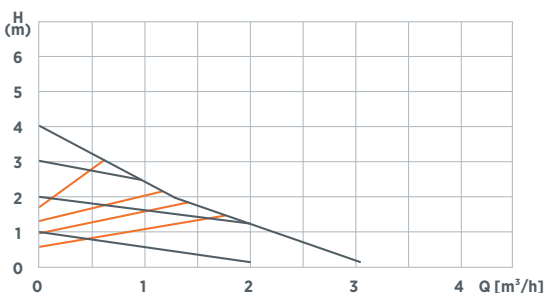

Characteristic WITA Delta HE light 55

