

Submersible pump QDX



Product advantages

- Durable and wear-resistant due to plastic impeller
- Built-in overload protection
- Double mechanical seal and improved cable seal design
- Long service life due to cast iron pump body, treated with electrophoresis technology, sand- and corrosion resistant
- NOW NEW: with 10 m connection cable

Technical data

QDX | 10-12-0.55K3-F


| 1.5-32-0.75K3-F

Max. head (m)	17	34
Max. Flow (m ³ /h)	18	6.5
Power P2 (kW)	0.55	0.75
Supply voltage	1x230V, 50Hz	1x230V, 50Hz
Protection class	IPX8	IPX8
Fluid temperature (°C)	40	40
Immersion depth (m)	0.5-5	0.5-5
Insulation class	B	B
Pump housing material	cast iron	cast iron
Impeller material	PPO + GF30	PPO + GF30
Cable (m)	10m Length incl. protective power plug	10m Length incl. protective power plug


Article No
| P TP340 7551

Article No
| P TP340 7102

Hydraulic characteristics

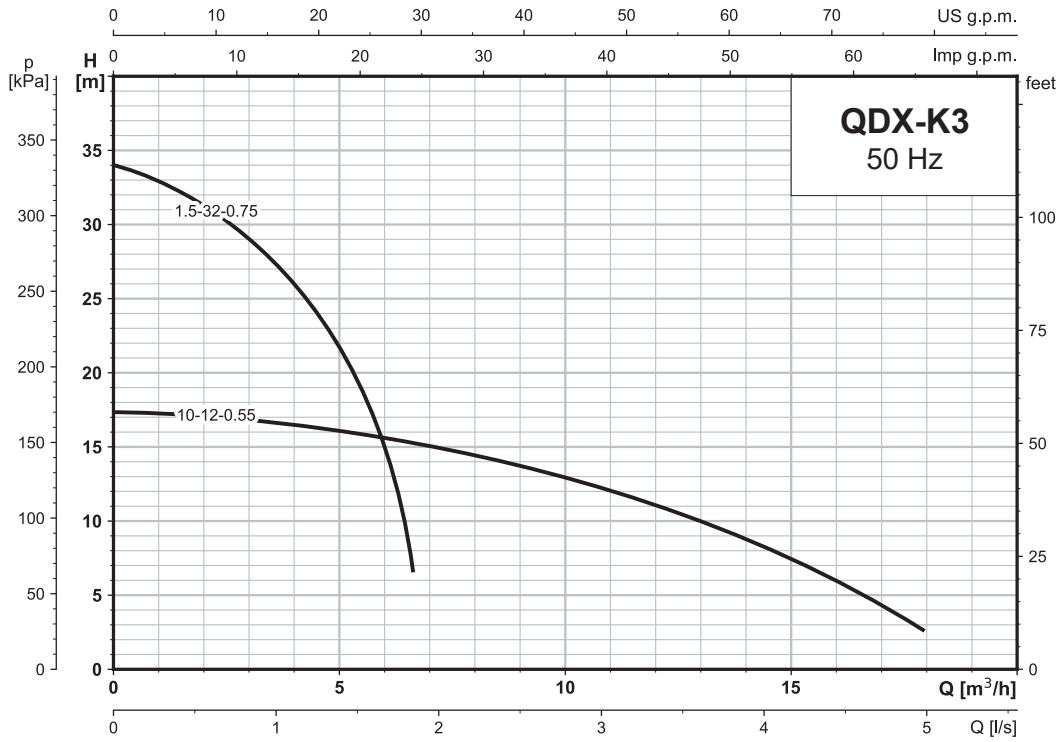

Dimensions and Weight

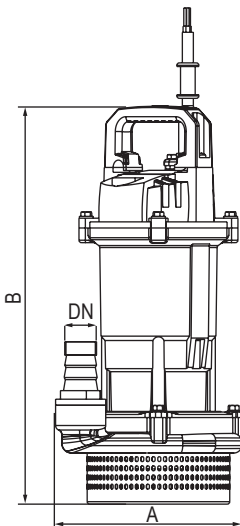

Model	Connections	Dimensions (mm)		Weight (kg)	
		A	B	N.W.	G.W.
QDX1.5-32-0.75-K3	1"	235	390	12	12.5
QDX10-12-0.55-K3	1½"	230	370	11	11.5