



## High efficiency pumps

# WITA HE go.future 40 | 60 light


## Product specials

- 5 Years warranty
- Anti-block function
- also available with PWM module or as 0 - 10 V version



## Technical Data

Max. pump lift	4,0 m   6,0 m
Max. flow rate	2.800 l/h   3.600 l/h
Power consumption	3 - 23 W   3 - 38 W
Control	4 constant characteristics, 4 proportional characteristics Anti-block function
Supply voltage	1 x 230V, 50 Hz
Motor protection	no external motor protection is required
Ip rating	IP 42
Ambient temperature	0 °C to +40 °C
Media temperature	+5 °C to +110 °C
Temperature class	TF 110 gem. CEN 335-2-51
Max. system pressure	10 bar
Connection size	DN 15, DN 20, DN 25, DN 32
Installation length	110 mm, 130 mm, 180 mm
Material pump housing	130 mm, 180 mm grey cast iron, cataphoresis coated 110 mm, 130 mm in brass
Weight incl. insulation	2,5 kg
EEI	≤ 0,20
Special equipment	available with PWM module and 0 - 10 V

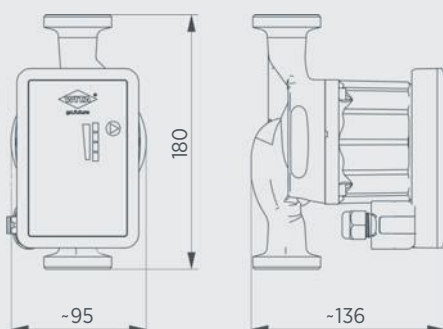

Characteristic WITA HE go.future 40 light



Characteristic WITA HE go.future 60 light

