


ORIGINAL ONLY WITH THE DIAMOND



**pump technology & more...**

**go.tec**

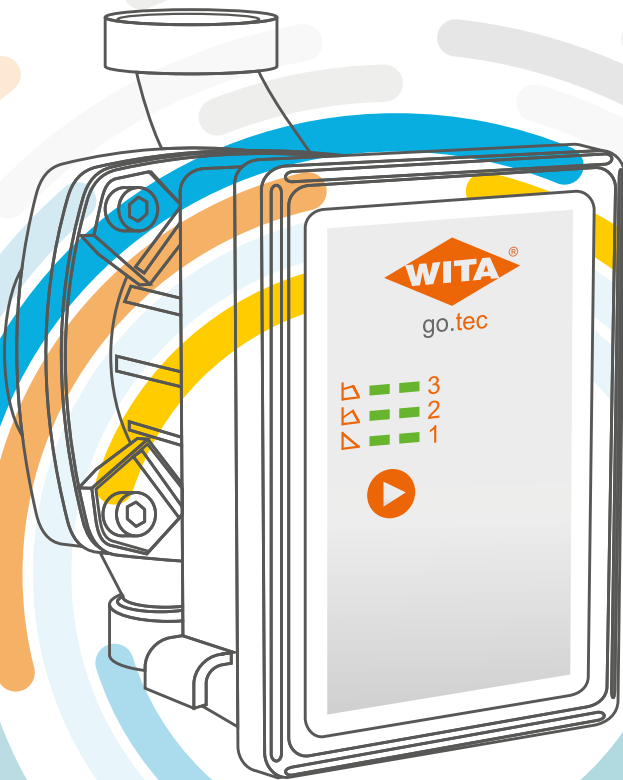




 go.tec H  
heating



 go.tec S  
solar



 go.tec G  
heat pumps

## Product Specials

- 5 years warranty
- SMART Adapt
- Anti-lock function
- Venting program
- Key lock
- Optionally:  
PWM1 for heating and  
PWM2 for solar available

# go.tec

| 40 | 60 | 70 | 80



## Technical Data | 40 | 60 | 70 | 80

Maximum delivery head	4 m   6 m   7 m   8 m
Maximum flow rate	2600 l/h   3200 l/h   3800 l/h   4300 l/h
Power consumption	3-25 W   3-45 W   3-65 W   3-80 W
Regulation	3 constant characteristics, 3 constant pressure characteristics, 3 proportional characteristics,
Additional function	anti-lock function, venting program, key lock
Supply voltage	1 x 230 V, 50 Hz
Motor protection	no external motor protection required
Protection rating	IP44
Ambient temperature	0 °C bis 60 °C
Media temperature	-10 °C bis 110 °C
Temperature class	TF 110 according to EN 60335-2-51
Max. system pressure	1.0 MPa   10 bar
Connection sizes	DN15, DN25
Installation lengths	130 mm, 180 mm
Pump housing material	grey cast iron cataphoretic coated; stainless steel
Weight incl. insulation	2,1 kg
EEI	go.tec   40 ≤ 0.17   60 ≤ 0.19   70 ≤ 0.19   80 ≤ 0.21

