


# Available mixing valves

## Technical data

Body	58 brass
Seal two	O-rings
Torque	Minimix 0.3 Nm
Torque	Maximix 0.4 Nm
Adjustment range	90°
Max. operating pressure	10 bar
Max. operating temperature	110°C
Medium Water (Max. percentage of glycol: 50%)	

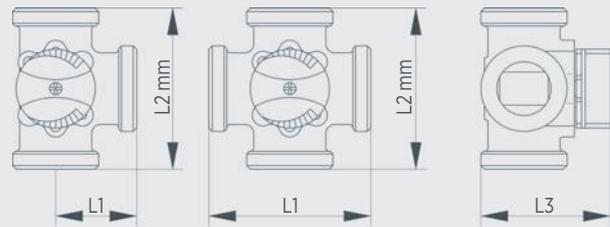

Minimix	Mixing valve type	Connection thread	Nominal diameter	L1 x L2 x L3	Kvs
	3-way 1/2"	1/2" F	DN 15	45 x 90 x 75	4 m <sup>3</sup> /h
	3-way 3/4"	3/4" F	DN 20	45 x 90 x 75	7 m <sup>3</sup> /h
	3-way 1"	1" M	DN 20	45 x 90 x 75	7 m <sup>3</sup> /h
	3-way 1"	1" F x 1 1/2" M	DN 25	45 x 90 x 75	10 m <sup>3</sup> /h
	3-way 1 1/4"	1 1/4" F	DN 32	45 x 90 x 75	15 m <sup>3</sup> /h
	3-way 1 1/2"	1 1/2" M	DN 32	45 x 90 x 75	15 m <sup>3</sup> /h
	4-way 1/2"	1/2" F	DN 15	90 x 90 x 75	4 m <sup>3</sup> /h
	4-way 3/4"	3/4" F	DN 20	90 x 90 x 75	7 m <sup>3</sup> /h
	4-way 1"	1" M	DN 20	90 x 90 x 75	7 m <sup>3</sup> /h
	4-way 1"	1" F x 1 1/2" M	DN 25	90 x 90 x 75	10 m <sup>3</sup> /h
	4-way 1 1/4"	1 1/4" F	DN 32	90 x 90 x 75	15 m <sup>3</sup> /h
	4-way 1 1/2"	1 1/2" M	DN 32	90 x 90 x 75	15 m <sup>3</sup> /h
Maximix	Mischer-Typ	Anschlussgewinde	Nennweite	L1 x L2 x L3	Kvs
	3-way 1 1/2"	1 1/2" F	DN 40	110 x 55 x 85	25 m <sup>3</sup> /h
	3-way 2"	2" F	DN 50	120 x 60 x 92	40 m <sup>3</sup> /h
	4-way 1 1/2"	1 1/2" F	DN 40	110 x 110 x 85	25 m <sup>3</sup> /h
	4-way 2"	2" F	DN 50	120 x 120 x 92	40 m <sup>3</sup> /h
Minimix E	Mischer-Typ	Anschlussgewinde	Nennweite	L1 x L2 x L3	Kvs
	3-way 1"	1" F	DN 25	45 x 90 x 75	10 m <sup>3</sup> /h
	3-way 1 1/4"	1 1/4" F	DN 32	45 x 90 x 75	15 m <sup>3</sup> /h