



High efficiency pumps

WITA Delta TOP 40 | TOP 60

Product specials

- Warranty
- Air vent program
- Keylock
- Anti-block function
- Also available with PWM module




Technical Data

| | |
|-------------------------|-----------------------------------------------------------------------------------------------------------|
| Max. pump lift | 4.0 m 6.0 m |
| Max. flow rate | 2.800 l/h 3.600 l/h |
| Power consumption | 3 - 23 W 3 - 42 W |
| Control | 4 constant characteristics, 4 proportional characteristics, Air vent program, Keylock anti-block function |
| Supply voltage | 1 x 230V, 50 Hz |
| Motor protection | No external motor protection required |
| Ip rating | IP 42 |
| Ambient temperature | 0 °C to +40 °C |
| Media temperature | +5 °C to +110 °C |
| Temperature class | TF 110 as per CEN 335-2-51 |
| Max. system pressure | 10 bar |
| Connection size | DN 15, DN 20, DN 25, DN 32 |
| Installation lengths | 110 mm, 130 mm, 180 mm |
| Pump housing material | 130 mm, 180 mm variant in grey cast iron cataphoresis coated; 110 mm, 130 mm variant in brass |
| Weight incl. insulation | 2.5 kg |
| EEI | ≤ 0.18 ≤ 0.20 |
| Special equipment | Also available with PWM module |



Characteristic WITA Delta TOP 40

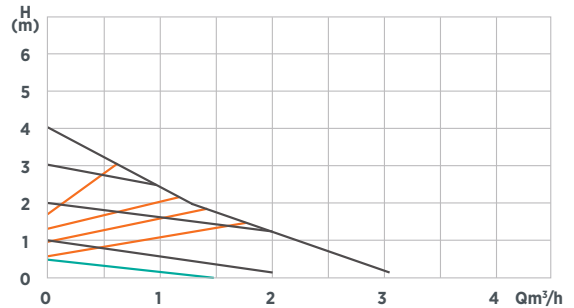

Characteristic WITA Delta TOP 60

