



EEL
≤0.20



WITA

go.future 2



light 40 | 60

Product advantages

- 5 years warranty
- LED display of characteristics
- Anti-block function
- Venting function
- Button lock
- Also available as PWM (solar/heating)

Technical data


| 40 | 60



Maximum delivery head	4 m 6 m
Maximum flow rate	2600 l/h 3200 l/h
Power consumption	3-23 W 3-38 W
Regulation	4 constant speed modes 4 proportional pressure modes
Additional functions	LED display of characteristics, Anti-block function, venting function, button lock
Supply voltage	1 x 230 V, 50 Hz
Motor protection	no external motor protection required
Protection rating	IP 42
Ambient temperature	0 °C to +40 °C
Media temperature	+5 °C to +110 °C
Temperature class	TF 110 according to EN 60335-2-51
Maximum system pressure	10 bars
Connection sizes	DN 15, DN 20, DN 25, DN 32
Installation lengths	110 mm, 130 mm, 180 mm
Pump housing material	130 mm, 180 mm in grey cast iron cataphoresis coated; 110 mm, 130 mm in brass
Weight incl. insulation	2.1 kg
EEL	≤ 0.20

All product dimensions are presented in mm.

Characteristic WITA go.future 2 - light 40

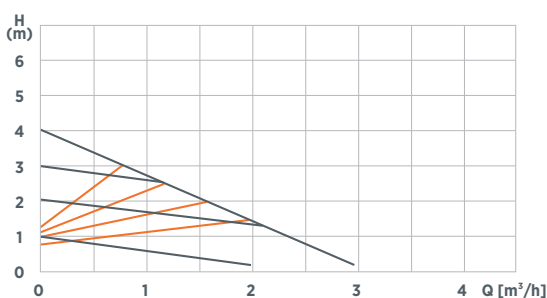

Characteristic WITA go.future 2 - light 60

