



# WITA

## go.future 2


### 40 | 60 LED

#### Product advantages

- 5 years warranty
- Night setback mode in minimum speed level
- LED display of power consumption
- Venting function
- Button lock
- Anti-block function
- Also available as PWM (solar/heating) and 0-10 V version

#### Technical data


| 40 | 60

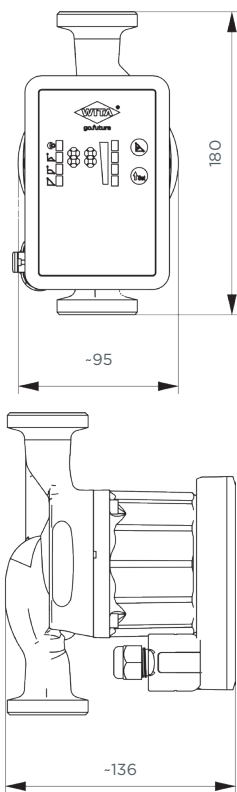

Maximum delivery head	4 m   6 m
Maximum flow rate	2800 l/h   3600 l/h
Power consumption	3-23 W   3-41 W
Regulation	4 constant speed modes, 4 proportional pressure modes, 4 constant pressure characteristics
Additional functions	minimum operation function / manual night setback, automatic night setback, LED display of characteristics, venting function, button lock, anti-block function
Supply voltage	1 x 230 V, 50 Hz
Motor protection	no external motor protection required
Protection rating	IP 42
Ambient temperature	0 °C to +40 °C
Media temperature	+5 °C to +110 °C
Temperature class	TF 110 according to EN 60335-2-51
Maximum system pressure	10 bar (1 MPa)
Connection sizes	DN 15, DN 20, DN 25, DN 32
Installation lengths	110 mm, 130 mm, 180 mm
Pump housing material	130 mm, 180 mm in grey cast iron cataphoresis coated; 110 mm, 130 mm in brass
Weight incl. insulation	2.5 kg
EEI	40 ≤ 0,18   60 ≤ 0,20
Additional option	also available as PWM and 0-10 V version

All product dimensions are presented in mm.

Characteristic WITA go.future 2- 40 LED

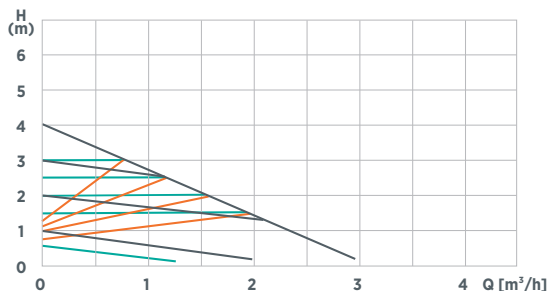

Characteristic WITA go.future 2- 60 LED

