



**EEL**  
≤ 0.19




# WITA go.max 40 | 60

## Product advantages

- 5 years warranty
- SmartAdapt function
- LED display of energy consumption
- Night setback mode in minimum speed level
- Button lock
- Anti-block function

## Technical data

| 40 | 60

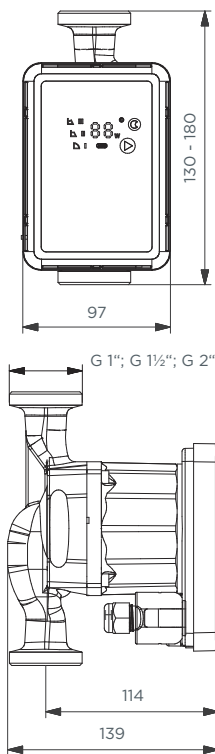

Maximum delivery head	4 m   6 m
Maximum flow rate	2600 l/h   3400 l/h
Power consumption	3-23 W   4-43 W
Regulation	3 constant speed modes, 3 constant pressure characteristics, 3 proportional pressure modes
Additional function	Smart Adapt, automatic night mode
Supply voltage	1 x 230 V 50 Hz
Emission sound pressure level	< 43 dB(A)
Ambient temperature	0 °C to 40 °C
Media temperature	2 °C to 95 °C
Temperature class	TF 110
Max. system pressure	10 bar (1 MPa)
Connection sizes	DN 20, DN 25, DN 32
Installation lengths	130 mm, 180 mm
Permitted pumped media	heating water according to VDI 2035 water/glycol mixture 1:1
Weight incl. insulation	2.4 kg
EEL	≤ 0.19

All product dimensions are presented in mm.

